

DEMOLITION NOTES A REMOVE PORTION OF EXISTING WALL FOR NEW DOOR. PATCH ADJACENT WALLS, CEILINGS AND

B REMOVE EXISTING DOOR, FRAME, HARDWARE &

C EXISTING COLUMN TO REMAIN.

D EXISTING DOOR TO REMAIN INCLUDING

E EXISTING WALL TO REMAIN

F RELOCATE EXISTING POWER, LIGHT SWITCH, FIRE ALARM PULL, ETC. DUE TO DOOR MODIFICATIONS. RE: ELECTRICAL DRAWINGS.


G EXISTING FLOORING, WALL BASE AND CEILING TO REMAIN. PATCH AS REQUIRED.

H REMOVE EXISTING CAN LIGHT FIXTURE. REPLACE EXISTING ACT TILE AT REMOVAL LOCATION TO

MATCH EXISTING ADJACENT TILES. J ADJUST EXISTING CEILING GRID AND TILES TO

ACCOMMODATE NEW WALL IN CORRIDOR 001.



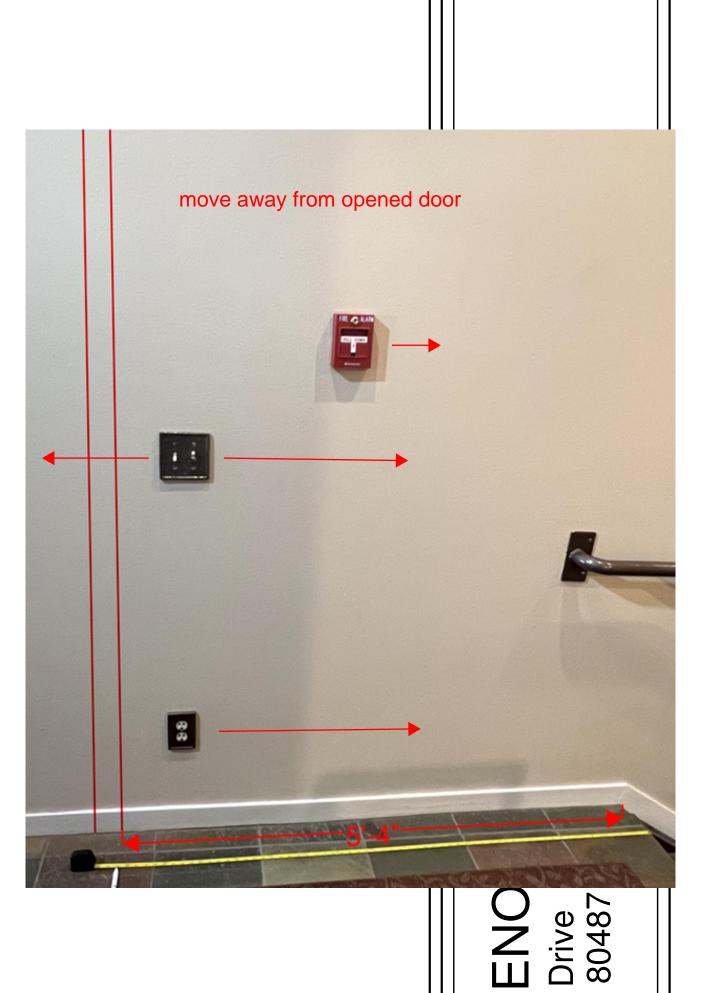

KEY NOTES 1 PROVIDE NEW 2X4 WALL WITH BATT INSULATION FROM FLOOR TO STRUCTURE ABOVE. TEXTURE AND PAINT TO MATCH EXISTING ADJACENT WALLS. PROVIDE WALL BASE TO MATCH EXISTING ADJACENT. 2 INFILL EXISTING DOOR OPENING WITH WALL TO MATCH EXISTING ADJACENT THICKNESS. INCLUDE BATT INSULATION IN INFILL. TEXTURE AND PAINT COLOR TO MATCH EXISTING ADJACENT. PROVIDE WALL BASE TO MATCH EXISTING ADJACENT. PROVIDE NEW 3'-0" W X 6'-8" HIGH FULL GLASS DOOR. SPECIES TO BE STAIN GRADE MAPLE. STAIN COLOR TBD BY OWNER. DOOR TO HAVE LEVER HARDWARE WITH OFFICE LOCKSET. PROVIDE DOOR SILENCERS ON FRAME AND A DOOR BUMPER ON THE WALL. PROVIDE BATTERY POWERED KEYPAD ENTRY SYSTEM. EXISTING FLOOR FINISH TO REMAIN AT THE SILL OF THE DOOR. 4 PROVIDE NEW 3'-0" X 6'-8" FULL GLASS DOOR. SPECIES TO BE STAIN GRADE MAPLE. STAIN COLOR TBD BY OWNER. DOOR TO HAVE LEVER HARDWARE WITH PASSAGE SET. PROVIDE DOOR SILENCERS MOUNTED TO FRAME AND DOOR BUMPER ON THE WALL. PROVIDE BLACK SILL AT THIS DOOR. SEE SILL ON EXISTING DOOR FROM CONF ROOM 003 TO WORKSPACE 004 FOR EXAMPLE OF SILL. 5 RELOCATE EXISTING ELECTRICAL SWITCH/OUTLET DUE TO DOOR MODIFICATIONS. 6 RELOCATE EXISTING FIRE ALARM PULL STATION. FIRE ALARM SUB-CONTRACTOR TO PROVIDE GUIDANCE AND APPLY FOR PERMIT FOR FIRE ALARM MODIFICATIONS. 7 EXISTING COLUMN TO REMAIN.

8 PROVIDE A WALL MOUNTED EXIT SIGN ABOVE THE DOOR.

 \bigcirc

