

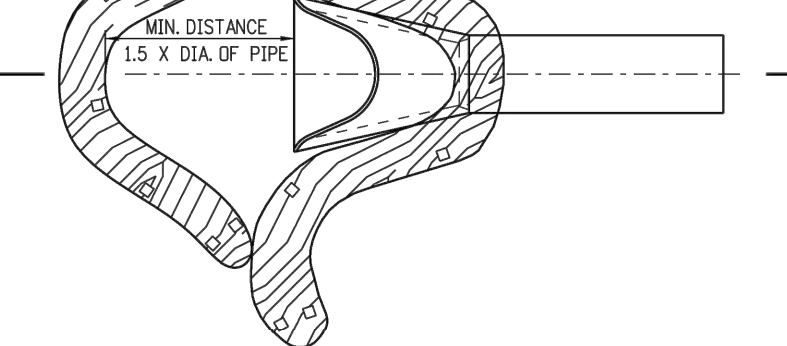

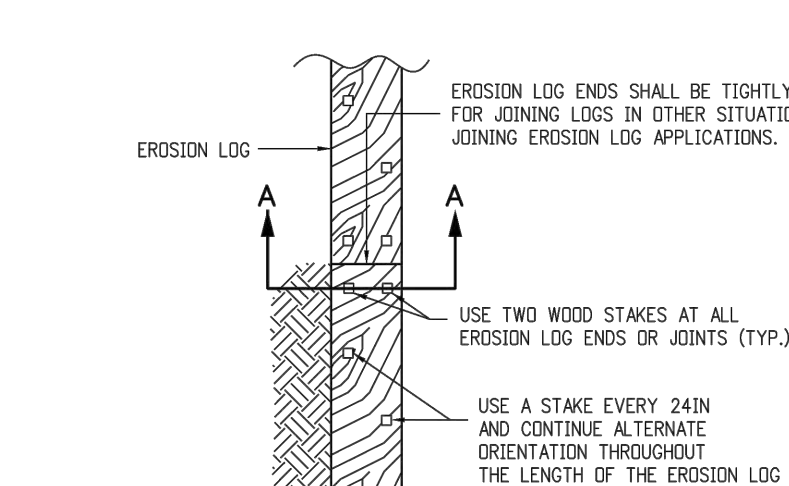


Standard Notes for Construction Site Management Plans:

1. This plan shall be kept on site at all times and updated to reflect any changes.
2. Clearing or grading shall not begin until all control measures have been installed.
3. Contractor is responsible for installing and maintaining temporary erosion and sediment control measures during construction and establishing any required permanent control measures to prevent release of pollutants from the project site.
4. Control measures shall be used, modified, and maintained whenever necessary to reflect current conditions. Control measures shall be inspected weekly and after every precipitation event. Accumulated sediment shall be removed from control measures when the sediment level reaches $\frac{1}{2}$ the height of the control measure.
5. The contractor shall promptly remove all sediment, mud, and construction debris that may accumulate in the right of way, private property, or water ways as a result of the construction activities.
6. All ingress and egress access points on to the disturbed site must be stabilized with a vehicle tracking control pad. Access shall only be via approved locations as shown on approved CSMP.
7. Temporary soil stabilization measures shall be implemented where ground disturbances have temporarily or permanently ceased for 14 days or for areas of land disturbance within one growing season.
8. Concrete waste and washout water from mixing trucks shall be contained on site, removed from the site, and properly disposed. Materials shall not be allowed to enter state waters.
9. Contractor is responsible for complying with all local, state, and federal laws. In addition contractor must obtain required permits.
10. Emergency access must be kept obstacle free and passable at all times.
11. For any work to be done in the Right of Way, coordinate with the City ROW Manager regarding special permitting. No work shall be conducted in the ROW between November 1 and May 1 without prior approval from the director of Public Works.
12. Where required as part of the ROW permit or where site work affects the pedestrian or vehicle travel way, traffic control shall be installed. All traffic control shall be in accordance with the Manual on Uniform Traffic Control Devices, latest edition.
13. Sidewalks adjacent to construction sites shall be maintained, for public use, by the contractor. In areas where construction is taking place next to the sidewalk and overhead hazards are possible, site is responsible for installing and maintaining sidewalk protection.

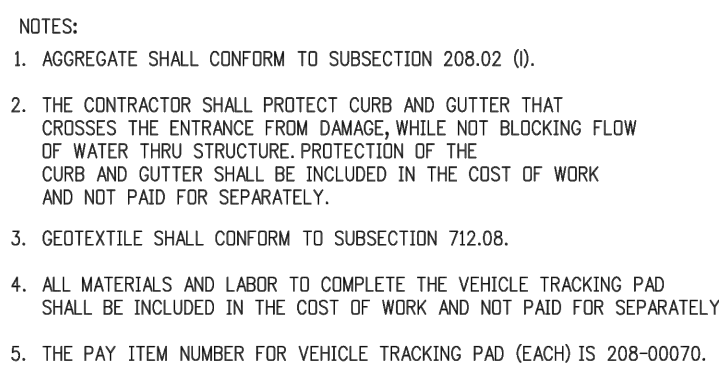

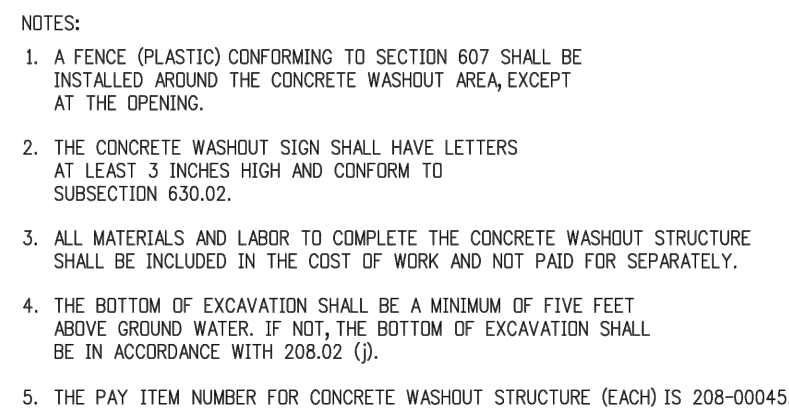

Computer File Information		
Creation Date: 07/31/19		
Designer Initials: JBK		
Last Modification Date: 07/31/19		
Detailer Initials: LTA		
CAD Ver.: MicroStation V8	Scale: Not to Scale	Units: English

	Sheet Revisions	
	Date:	Comments
(R-X)		
(R-X)		
(R-X)		
(R-X)		

Colorado Department of Transportation
 2829 West Howard Place
 CDOT HQ, 3rd Floor
 Denver, CO 80204
 Phone: 303-757-9021 FAX: 303-757-9868
Project Development Branch **JBK**

TEMPORARY EROSION CONTROL

STANDARD PLAN NO.
M-208-1
Standard Sheet No. 2 of 11
Project Sheet Number:



EROSION LOGS PAY ITEMS	
NUMBER	DESCRIPTION
208-00012	TYPE 1 (9 IN.)
208-00002	TYPE 1 (12 IN.)
208-00013	TYPE 1 (20 IN.)
208-00007	TYPE 2 (8 IN.)
208-00008	TYPE 2 (12 IN.)
208-00009	TYPE 2 (18 IN.)
208-00022	TYPE 3 (9 IN.)
208-00023	TYPE 3 (12 IN.)
208-00024	TYPE 3 (20 IN.)

Computer File Information		
Creation Date:	07/31/19	
Designer Initials:	JBK	
Last Modification Date:	07/31/19	
Detailer Initials:	LTA	
CAD Ver.:	MicroStation V8	Scale: Not to Scale Units: English

	Sheet Revisions	
	Date:	Comments
(R-X)		
(R-X)		
(R-X)		
(R-X)		

Colorado Department of Transportation
2829 West Howard Place
CDDT HQ, 3rd Floor
Denver, CO 80204
Phone: 303-757-9021 FAX: 303-757-9868
Project Development Branch JBK

<p style="text-align: center;">TEMPORARY EROSION CONTROL</p> <p>Issued by the Project Development Branch: July 31, 2019</p>
--

STANDARD PLAN NO.
M-208-1
Standard Sheet No. 3 of 11
Project Sheet Number:



LENGTH (L) OF INLET FT.	NUMBER OF AGGREGATE BAGS UPSTREAM OF INLET
0 - 5	1
6 - 10	2
L > 10	3



Computer File Information		
Creation Date: 07/31/19		
Designer Initials: JBK		
Last Modification Date: 07/31/19		
Detailer Initials: LTA		
CAD Ver.: MicroStation V8	Scale: Not to Scale	Units: English

	Sheet Revisions	
	Date:	Comments
(R-X)		
(R-X)		
(R-X)		
(R-X)		

Colorado Department of Transportation
2829 West Howard Place
CDDT HQ, 3rd Floor
Denver, CO 80204
Phone: 303-757-9021 FAX: 303-757-9868


Project Development Branch **JBK**

TEMPORARY EROSION CONTROL

Issued by the Project Development Branch: July 31, 2019

STANDARD PLAN NO.
M-208-1
Standard Sheet No. 4 of 11
Project Sheet Number:

CALL UTILITY NOTIFICATION CENTER OF
COLORADO



Know what's below.
Call before you dig.

CALL 2 BUSINESS DAYS IN ADVANCE BEFORE YOU
DIG, GRADE, OR EXCAVATE FOR THE MARKING OF
UNDERGROUND MEMBER UTILITIES.



SHEET
C.610

These drawings are instruments of service provided by Landmark Consultants, Inc. and are not to be used for any type of construction or contracting unless signed and sealed by a Professional Engineer in the employ of Landmark.

CIVIL ENGINEERS | SURVEYORS


141 9th Street ~ P.O. Box 774943
Steamboat Springs, Colorado 80477
(970) 871-9494
www.LANDMARK-CO.com




LANDMARK
CONSULTANTS, INC.



IP




IP



WD



SF

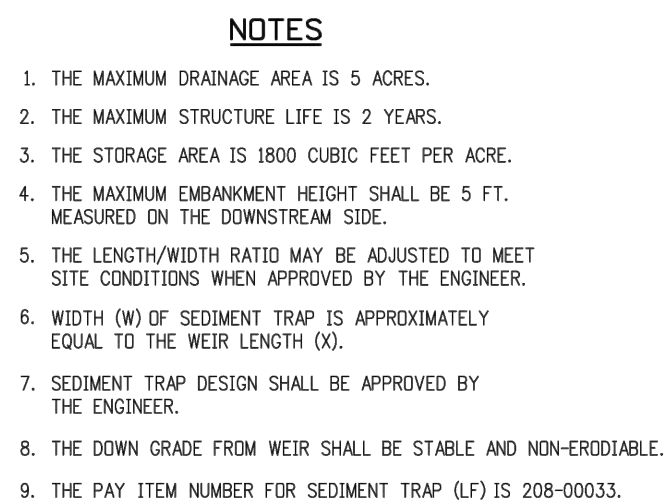WEIR LENGTH TABLE

SEDIMENT TRAP

Computer File Information		Sheet Revisions		Colorado Department of Transportation 2829 West Howard Place 5007 140, 3rd Floor Denver, CO 80204 Phone: 303-757-9021 FAX: 303-757-9868		TEMPORARY EROSION CONTROL		STANDARD PLAN NO. M-208-1	
Creation Date: 07/31/19		Date: _____		 Project Development Branch		JBK Issued by the Project Development Branch: July 31, 2019		Standard Sheet No. 9 of 11 Project Sheet Number: _____	
Designer Initials: EBK		(R-2)							
Last Modification Date: 07/31/19		(R-2)							
Detailer Initials: LTA		(R-2)							
CAD User: MicroStation V8 Scale: Not to Scale Units: English		(R-2)							



- NOTES:
1. RIPRAP SIZE $D_{50} \approx 6$ IN OR AS SHOWN ON THE PLANS.
 2. THE GEOTECHNICAL EROSION CONTROL SHALL BE CLASS 2 AND CONFORM TO THE REQUIREMENTS OF SUBSECTION 712.08.
 3. THE ENDS OF RIPRAP CHECK DAM SHALL BE A MINIMUM OF 6 IN. HIGHER THAN CENTER OF CHECK DAM.
 4. FOR USE AS TEMPORARY CHECK DAMS ONLY AND NOT FOR PERMANENT INSTALLATIONS.
 5. THE PAY ITEM NUMBER FOR ROCK CHECK DAM (EA) IS 208-00041.

NOTE: ALL MATERIALS AND LABOR TO COMPLETE THE ROCK CHECK DAM SHALL BE INCLUDED IN THE COST OF WORK.

ROCK CHECK DAM



Computer File Information		Sheet Revisions		Colorado Department of Transportation		TEMPORARY		STANDARD PLAN NO.	
Creation Date: 07/31/19		Date: _____		 2829 West Howard Place CDOT HQ, 3rd Floor Denver, CO 80204 Phone: 303-757-9021 FAX: 303-757-9868		EROSION CONTROL		M-208-1	
(R-2) Designer Initials: JHK		Comments						Standard Sheet No. 11 of 11	
(R-2) Last Modification Date: 07/31/19									
(R-2) Detailer Initials: LTA									
CAD Ver.: MicroStation V8 Scale: Not to Scale Units: English		(R-2)		Project Development Branch JBK		Issued by the Project Development Branch: July 31, 2019		Project Sheet Number:	



EROSION BALE CULVERT INLET PROTECTION



EROSION BALE TRENCHING AND STAKING




NOTE: LOCATE EROSION BALES AT THE OUTSIDE
EDGE OF THE CONCRETE APRON.

EROSION LOG FILTER AT DROP INLET

(NOT SPECIFIED - DETAIL PROVIDED IF FIELD CONDITIONS WARRANT APPLICATION)

EROSION BALE APPLICATIONS

Computer File Information		Sheet Revisions		Colorado Department of Transportation 2829 West Howard Place 5307 160, 3rd Floor Denver, CO 80204 Phone: 303-757-9021 FAX: 303-757-9868		TEMPORARY EROSION CONTROL		STANDARD PLAN NO. M-208-1	
Creation Date: 07/31/19		Date:				Standard Sheet No. 10 of 11		Project Sheet Number:	
Designer Initials: JKB		(R2D)							
Last Modification Date: 07/31/19		(R2D)							
Detailer Initials: LTA		(R2D)							
CAD User: MicroStation VR Scale: Not to Scale Units: English		(R2D)		Project Development Branch		JKB		Issued by the Project Development Branch: July 31, 2019	

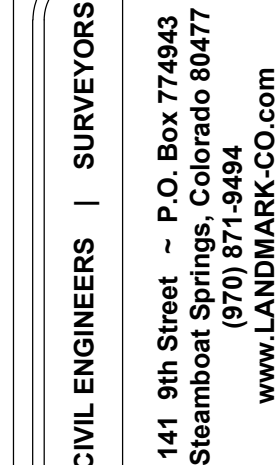

These drawings are instruments of service provided by Landmark Consultants, Inc. and are not to be used for any type of construction or contracting unless signed and sealed by a Professional Engineer in the employ of Landmark

[illegible]

PROJECT:	1012-050
DATE:	2/3/22
CONTACT:	Grip
EMAIL:	outko@lindemans.co.com

WILD BLUE GONDOLA

Temporary Erosion Control Details

SHEET

C.612

**REVIEWED
FOR
CODE
COMPLIANCE**
06/20/2022



Know what's below.
Call before you dig.

