



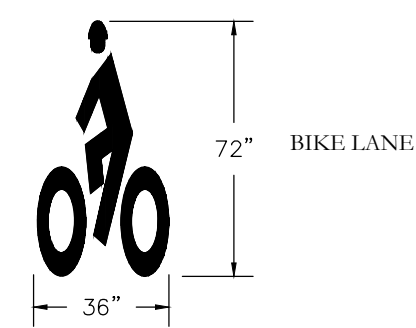


MUTCD SIGN LEGEND

-  STOP SIGN (R1-1)
-  BIKE LANE (R13-17)
-  SPEED LIMIT (R2-1), VARIES
25
-  NO PARKING (R8-3A)

PAVEMENT MARKING LEGEND



NOTES


- 1) ALL SIGNS SHALL CONFORM TO MUTCD STANDARDS UNLESS NOTED OTHERWISE AND SHALL BE INSTALLED PER CDOT STANDARDS FOR CLASS 1 SIGNS. SEE CDOT STANDARD PLANS S-614.2.
- 2) ALL PAVEMENT MARKINGS SHALL CONFORM TO CDOT STANDARDS AND BE PAINTED WITH MUTCD APPROVED RETROREFLECTIVE PAINT. SEE CDOT STANDARD PLANS S-627.1.
- 3) GROUND SIGN PLACEMENT SHALL CONFORM TO CDOT STANDARDS. SEE CDOT STANDARD PLANS S-614.1.
- 4) SIGN PANEL GAUGE THICKNESS AND MATERIAL SHALL BE 0.08" ALUMINUM.
- 5) STREET NAME SIGNS SHALL BE INCLUDED ABOVE ALL INSTALLED STOP SIGNS PER SECTION 2A.16 OF THE MUTCD.
- 6) CONTRACTOR IS RESPONSIBLE FOR SIGN FABRICATION.
- 7) STOP SIGN POSTS AND STREET SIGN POSTS SHALL BE 2-3/8" DIAMETER GALVANIZED STEEL WITHIN A BREAKAWAY SLEEVE.
- 8) ALL OTHER SIGN POSTS SHALL BE 2-1/4" GREEN STEEL U-CHANNEL WITH 3/8" HOLES SPACED EVERY 1".
- 9) STREET SIGNS SHALL BE ORIENTED TO FACE ONCOMING TRAFFIC.



440 S. Lincoln Ave, Suite 4A
P.O. Box 775966
Steamboat Springs, CO 80487
(970)-871-6772
www.fourpointse.com

No.	DATE	REVISIONS	
		DESCRIPTION	BY
1	2/12/2024	DRT REVIEW & RESPONSE	
2	4/18/2024	DRT REVIEW & RESPONSE	

STEAMBOAT AIRPARK SUBDIVISION
CONSTRUCTION DRAWINGS
GLORIA GOSSARD PARKWAY
STEAMBOAT SPRINGS, CO 80487

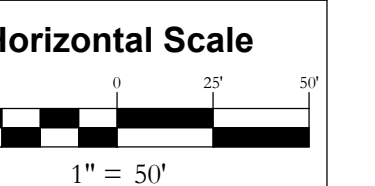

Contour Interval = 2 ft

DATE: 12-1-2023
JOB #: 1992-001
DRAWN BY: MDM
DESIGN BY: MDM
REVIEW BY: RL

IF THIS DRAWING IS PRESENTED IN A FORMAT OTHER THAN A4 X 36", THE GRAPHIC SCALE SHOULD BE UTILIZED.

DRAWING:
GLORIA GOSSARD
SIGN & PAVEMENT
MARKING PLAN #2

SHEET #

C17